



DOT LESS

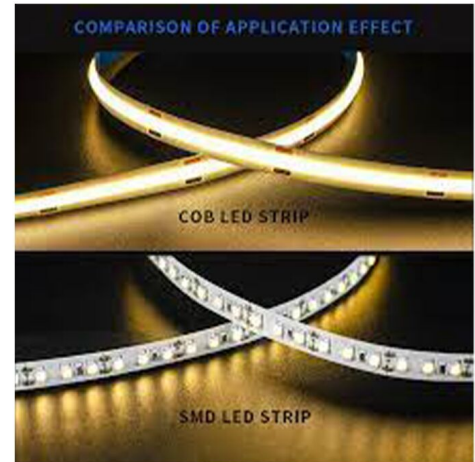


SPECIFICATIONS

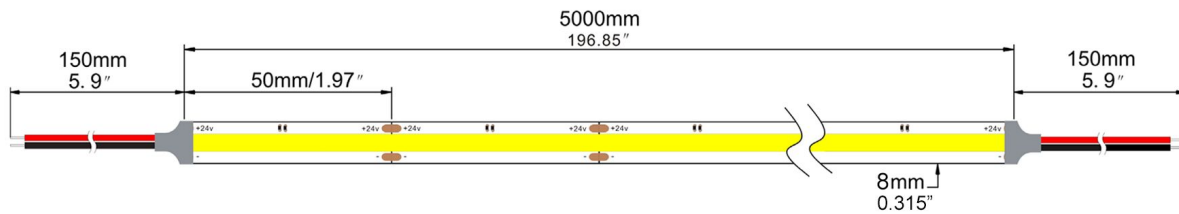

Electrical data

Lumen efficiency	110lm/w(4000K)
SDCM	≤ 3 (2700K, 3000K, 4000K)
Ra	Ra90
SMD Type	COB
LEDs/m	320LEDs/m
Max current/LED	26mA
Voltage	12V (24VDC option)
Max Length	Max Roll length 5/m
Width	8mm
Unit cut	50mm
Storage Temperature	-25°C / -13°F _{min} , 60°C / 140°F _{max}
LED PIN Temperature	Max.65°C / 149°F
Life Span	>54000H
Waterproof rate	IP20
Warranty	5 Years

Binning

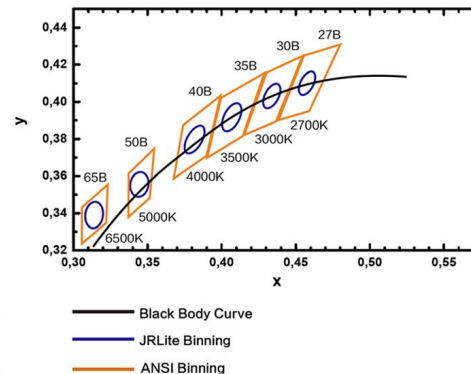

(Lm/m)

CCT \ Power	2700K	3000K	4000K	6500K	Max. Run Length
8W/M	720	762	769	775	5M
9W/M	952	997	1107	1091	5M

- COB strip can achieve the total DOT-FREE light effect without any profiles or PC covers.
- Achieve high lumen and Fancy Looking by the unique design
- One BIN only for good color consistency
- Wide range of CCT Choice

LIFESPAN >54000H

3 STEP
2700K
3000K
4000K

WARRANTY 5 YEARS

INDOOR



ONE BIN ONLY
Color consistency
Today and tomorrow


How to connect:

To connect COB, we use One-way end connector or Two-way end connector as the graph shown below:



How to use:

Method of using COB is the same as the ordinary soft strip.
 At present, we have waterproof and non-waterproof specifications.
 It can be widely used for indoor and outdoor decoration lighting.

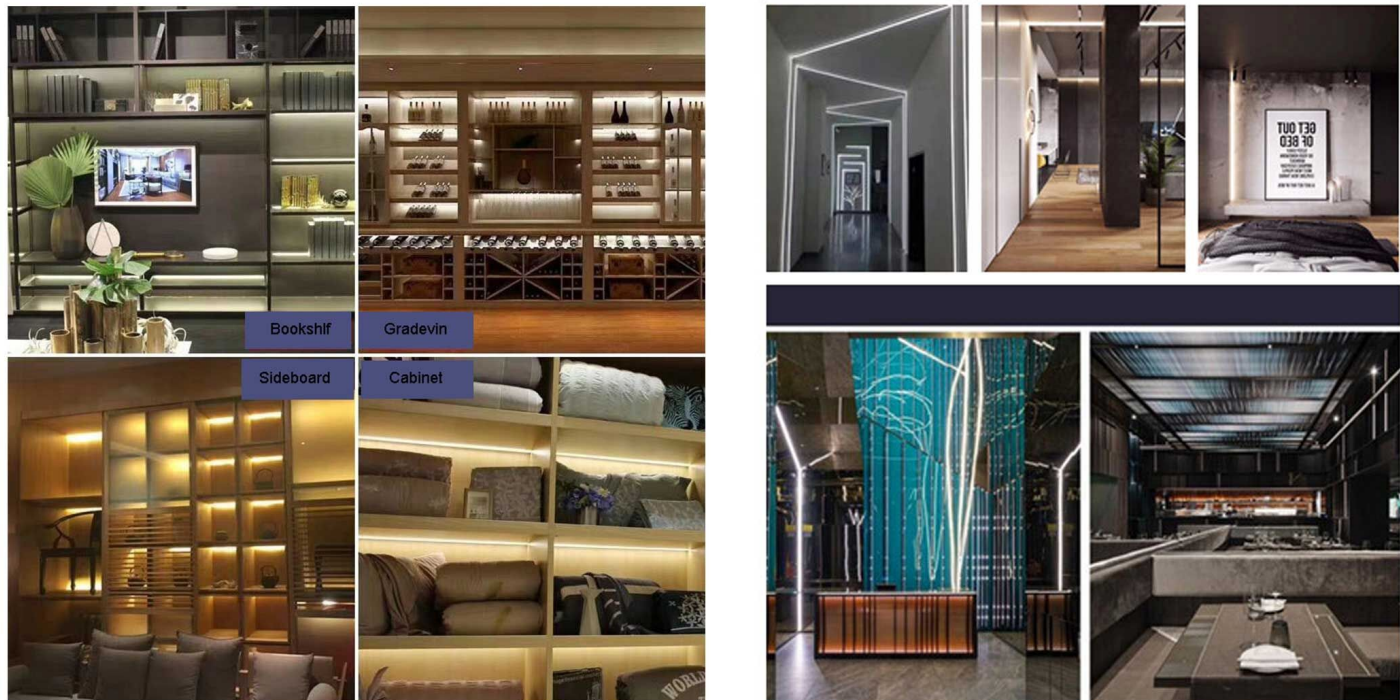

Bookshlf

Gradevin

Sideboard

Cabinet