

LED Light Bar



FEATURES

- Connect end to end up to 3m in series
- Low Profile
- Available in 300mm, 500mm, 800mm, 1000mm
- Warm White (3000K), Natural White (4000K), & Cool White (5000K)


APPLICATIONS

- Under Cabinet
- Showcase
- Kitchen
- Millwork
- Cove

SPECIFICATIONS

Voltage	12V			
Dimmable	Yes			
Beam Angle	90°			
IP Rating	Indoor			
CCT	3000K, 4000K, 5000K			
Trim	White			
Lens Option	Clear (96% Transparent) Milky (80% Transparent)			
Frame	Aluminium Body, Polycarbonate Lens			
Width	25mm (1in)			
Height	9mm, 10mm with optional bracket (~3/8in)			
Length	300mm	500mm	800mm	1000mm
Power	3W	5W	8W	10.5W
Lumens	325	520	830	1010

DIMENSIONS (300mm)

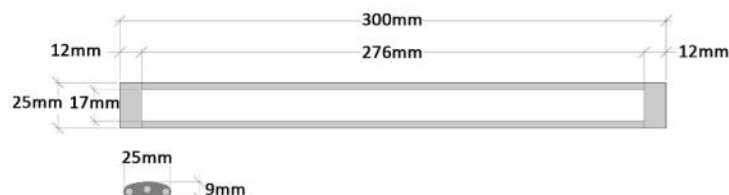

Available in 300mm, 500mm, 800mm and 1000mm

ACCESSORIES



Splice Connector



90° Splice Connector



Double Power Connector



Single Power Connector
(incl. in ea. box)



Mounting Bracket
(2pcs incl. in ea. box)

MAXIMUM RUN

When running in series, maximum run is 3m (3000 mm) of LED Bar Run additional lengths in parallel back to power supply. Always ensure power supply is capable of at least 115% of total wattage of lights.

Example

